



MODEL FF109-350

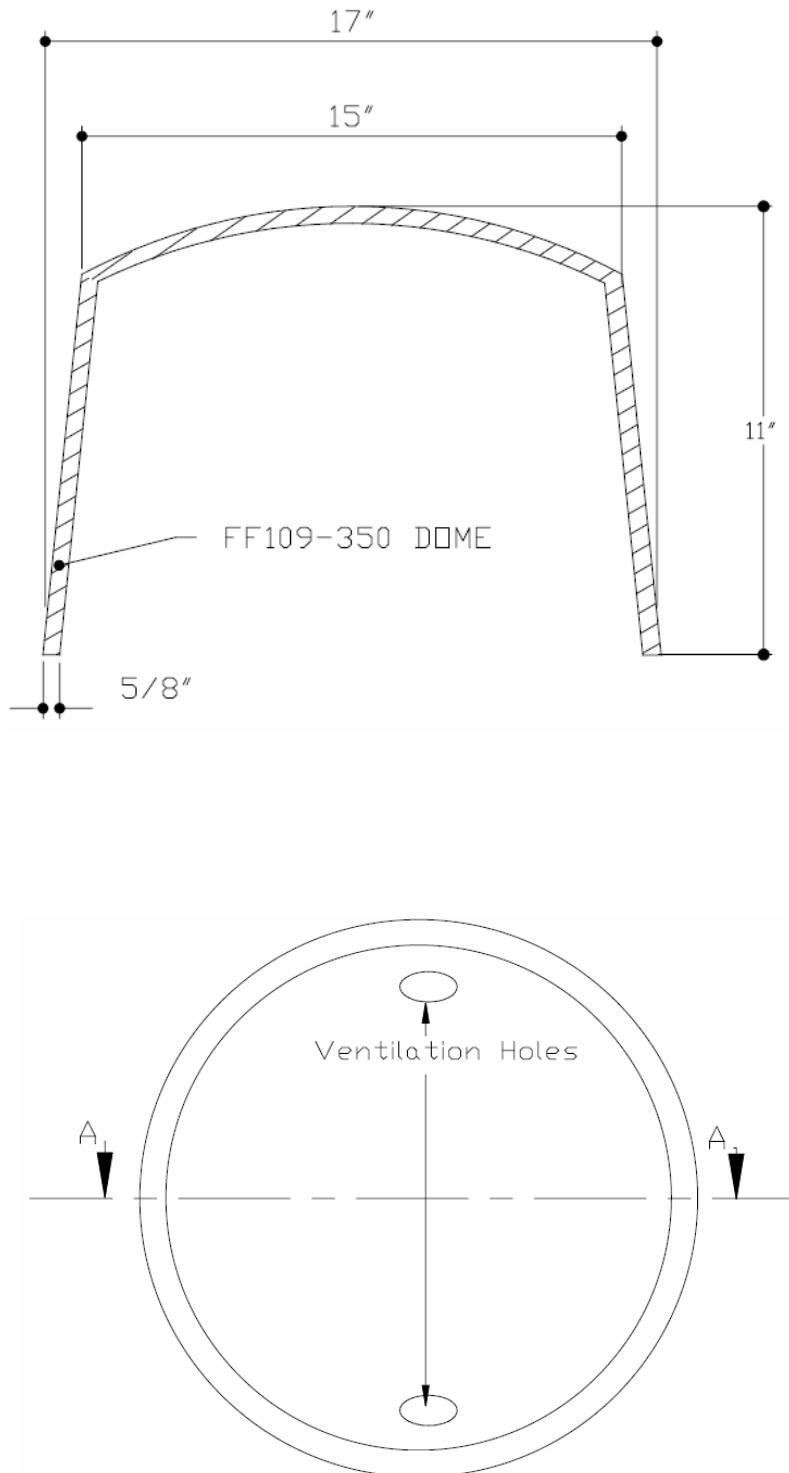

Model Number	Inside Height	Inside Diameter
FF109-350	10 3/8"	15"
Performance Data		
For Use: <ul style="list-style-type: none"> ETL - Intertek certified to maintain the fire rating (1 hour) of fire-rated floor/ceiling assemblies 		
		
General Information		
Benefits: <ul style="list-style-type: none"> 60 minute protection Fits most popular IC rated fixtures Can be used in L500 floor/ceiling assemblies Lightweight (approx. 1.5 lbs) Easy Installation—can be fitted in seconds—no screws, drilling or additional sealant required Flexible material enables cover to be fitted around obstacles or retro-fitted Enhances the acoustic protection of the ceiling Reduces heat loss through the fixture Significant energy cost savings Maintenance free 		
Manufactured By		
Tenmat Inc 23 Copper Drive Newport, DE 19804 Phone: (302) 633-6600 Fax: (302) 633-6838 Email: info@tenmatusa.com www.TenmatUSA.com		