



MODEL FF130 2x2

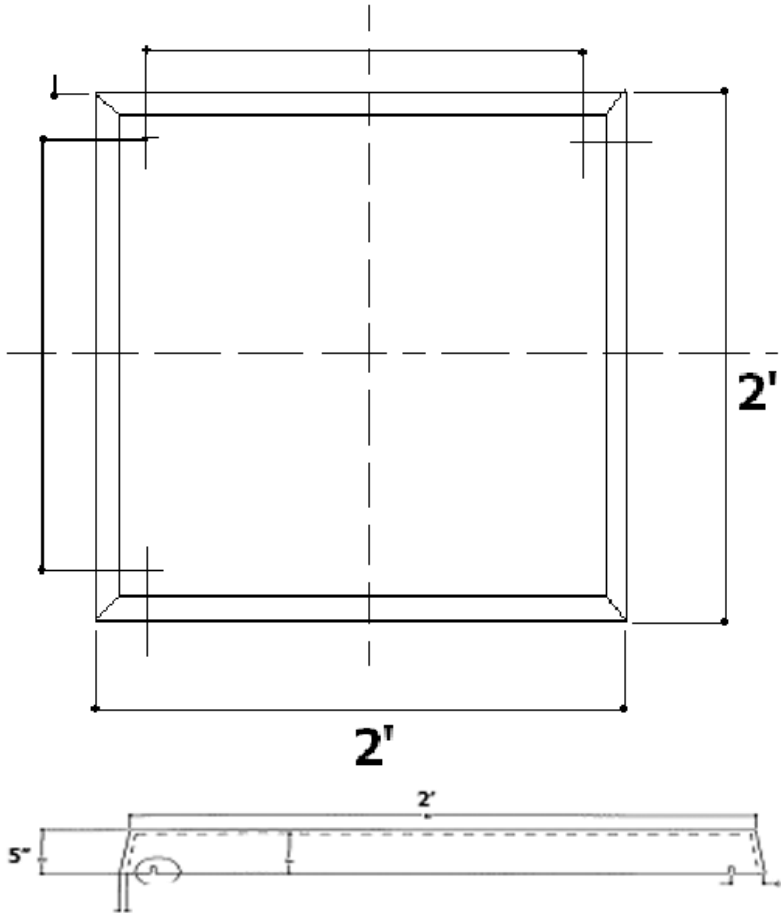

Model Number	Outside Height	Outside Length	Outside Width
FF130 2x2	5"	2'	2'
Performance Data			
For Use:			
UL Classified to maintain the fire rating (1 hour) for the following fire-rated assemblies: A202, D203, D216, D219, G205, G208, G218, G252, G255, G256, G262,G264, J201, J202, L006, L201, L202, L206, L209, L210, P202, P204, P206, P207, P210, P211, P213, P214,P216, P225, P227, P228, P229, P230, P231, P235, P238, P242, P246, P250, P251, P254, P255, P259, P260, P261, P264, P265, P267, P268, P269			
			
General Information			
Benefits:			
<ul style="list-style-type: none"> • 60 minute protection • Fits most popular florescent fixtures • Suitable for lay-in tile ceilings • Lightweight (approx. 5 lbs.) • Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required • Enhances the acoustic protection of the ceiling • Reduces heat loss through the fixture • Maintenance free • Cable entry points can be made anywhere on the top and sides for ease of wiring of the fixture • UL Classified 			
Manufactured By			
Tenmat Inc 23 Copper Drive Newport, DE 19804 Phone: (302) 633-6600 Fax: (302) 633-6838 Email: info@tenmatusa.com www.TenmatUSA.com			