
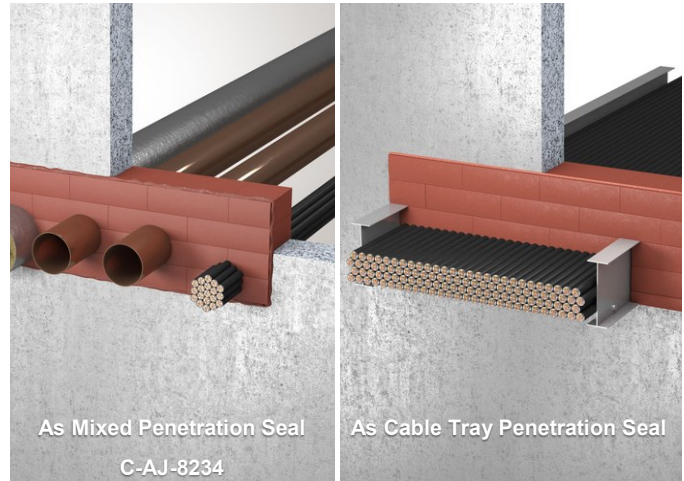


## UL Classified for cable, pipe or mixed penetrations, as well as blank openings

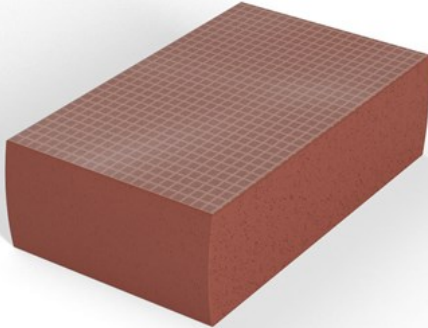

The FF260 Fire Protection Block is made of a rapidly expanding intumescent foam and the **ideal fire barrier for cable, pipe or mixed penetrations, as well as blank openings** in solid floor or ceiling systems. The flexible and lightweight material is suitable for retrofitting installation, as well as new construction and can be used for openings up to 384 in<sup>2</sup> with a maximum dimension of 32”.

### Key Benefits

- ⇒ Hour fire rated
- ⇒ Easy retroactive installation
- ⇒ **Cost-effective**
- ⇒ Easy Installation
- ⇒ For metallic pipes and cables
- ⇒ For floor or wall of min. 4-1/2” thick reinforced concrete or any UL Classified Concrete Blocks
- ⇒ **UL Classified**

### Approvals

Cable bundle up to 4” diameter, metal pipes up to 4” diameter optionally glass fiber insulated  
 Up to 6” x 24” steel or aluminum cable tray with max. 45% fill  
 Max. opening size: 384 in<sup>2</sup> with a max. dimension of 32”  
**C-AJ-0150** Blank opening in solid wall or floor  
**C-AJ-4104** Cable tray with cables in solid wall or floor  
**C-AJ-4105** Cable tray with cables in solid wall or floor  
**C-AJ-8233** Mixed penetration seal in solid wall or floor  
**C-AJ-8234** Mixed penetration seal in solid wall or floor  
**W-L-0046** Blank opening in drywall  
**W-L-4085** Cable tray with cables in drywall

### Dimensions

