



# XHEZ.C-AJ-3378 - Through-penetration Firestop Systems

## Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Certified products, equipment, system, devices, and materials.
- Authorities Having Jurisdiction should be consulted before construction.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot always address every construction nuance encountered in the field.
- When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.
- Only products which bear UL's Mark are considered Certified.

## XHEZ - Through-penetration Firestop Systems

See General Information for Through-penetration Firestop Systems

### System No. C-AJ-3378

July 09, 2020

#### ANSI/UL1479 (ASTM E814)


F Rating — 2 Hr
T Rating — 1/2 Hr

### Cookies on UL

We use cookies to personalize content and ads, to provide social media features and to analyze our traffic. We also share information about your use of our site with our social media, advertising and analytics partners.. [Learn More](#)

[> Cookie Settings](#)

Accept

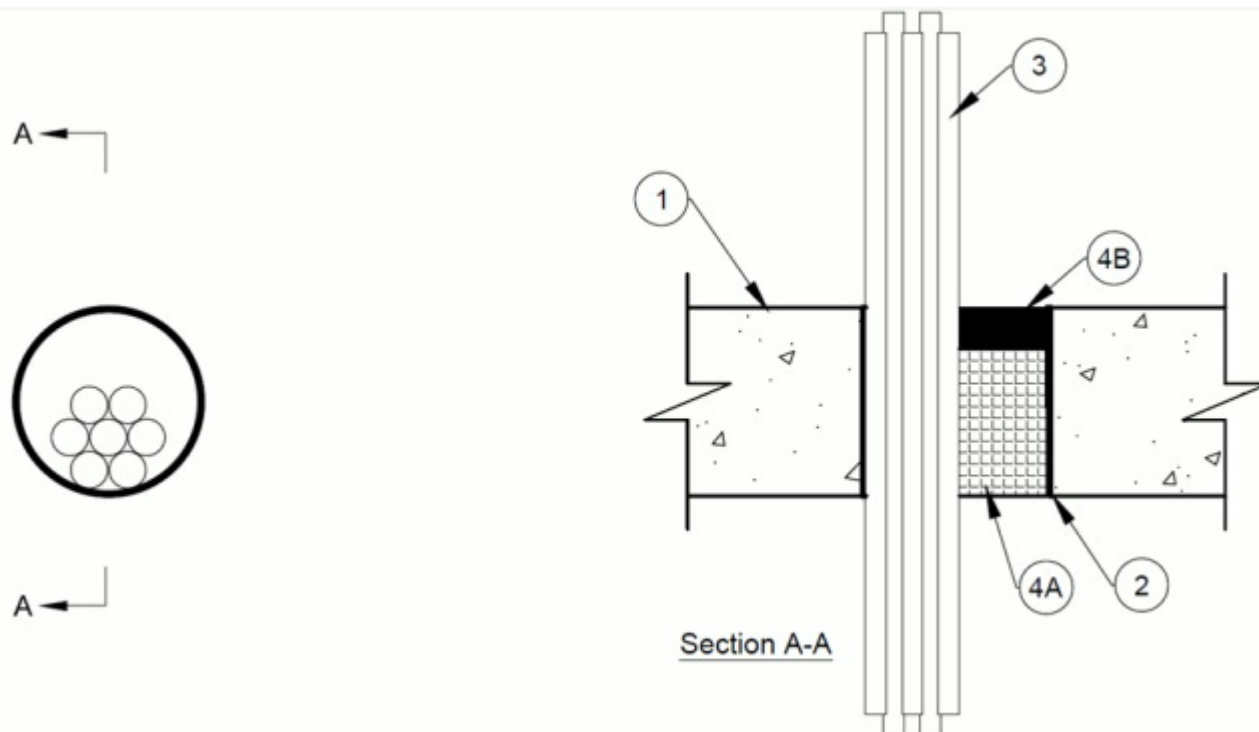

**1. Floor or Wall Assembly** — Min 4-1/2 in. (114 mm) thick reinforced lightweight or normal weight (100-150 pcf or 1600 - 2400 kg/m<sup>3</sup>) concrete. Wall may also be constructed of any UL Classified **Concrete Blocks\***. Max. diameter of opening is nom 4 in. (102 mm).

See **Concrete Blocks** (CAZT) category in the Fire Resistance Directory for names of manufacturers.

**2. Metallic Sleeve (Optional)** — Nom 4 in.(102 mm) diameter (or smaller) Schedule 5 (or heavier) steel sleeve or rigid steel conduit or electrical metallic tubing cast or grouted into floor or wall assembly, flush with floor or wall surfaces.

**3. Cables** — Aggregate cross-sectional area of bundled cables in opening to be max 45 percent of the cross-sectional area of the opening. The annular space between the cable bundle and the periphery of the opening or sleeve to be min 0 in. (point contact) to max 1-1/4 in. (32 mm). Cables to be tightly bundled together and rigidly supported on both sides of the floor or wall assembly. Any combination of the following types and sizes of cables may be used:

A. Max 300 pair No. 24 AWG (or smaller) copper conductor telecommunication cables with polyvinyl chloride (PVC) insulation and jacket.

B. Max 1/C 500 kcmil (or smaller) copper conductor cable with cross-linked polyethylene (XLPE) insulation and jacket.

C. Max 3/C No. 2 AWG copper or aluminum conductor cables with PVC insulation and jacket.

D. Max 7/C No. 12 AWG copper conductor power and control cables with PVC or cross-linked polyethylene (XLPE) insulation and jacket and PVC jacket.

E. Multiple fiber optic communication cables jacketed with PVC and having a max outside diameter of 1/2 in. (13 mm).

**4. Firestop System** — The firestop system shall consist of the following:

A. **Packing Material** — Min 4 in. (102 mm) thickness of min 4 pcf (64 kg/m<sup>3</sup>) mineral wool batt insulation firmly packed into opening as a permanent form. Packing material to be recessed from top surface of floor or from both surfaces of wall to accommodate the required thickness of fill material.

B. **Fill Void or Cavity Material** — Min 1/2 in. (13 mm) thickness of fill material applied with top surface of floor or with both surfaces of wall assembly and forced into interstices of cables to max extent possible.

**TENMAT INC** — Fire Protection Sealant FF365

We use cookies to personalize content and ads, to provide social media features and to analyze our traffic. [Cookie Settings](#)

Accept

**\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.**

Last Updated on 2020-07-09

---

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2020 UL LLC"

### Cookies on UL

We use cookies to personalize content and ads, to provide social media features and to analyze our traffic. We also share information about your use of our site with our social media, advertising and analytics partners.. [Learn More](#)

[> Cookie Settings](#)

Accept