
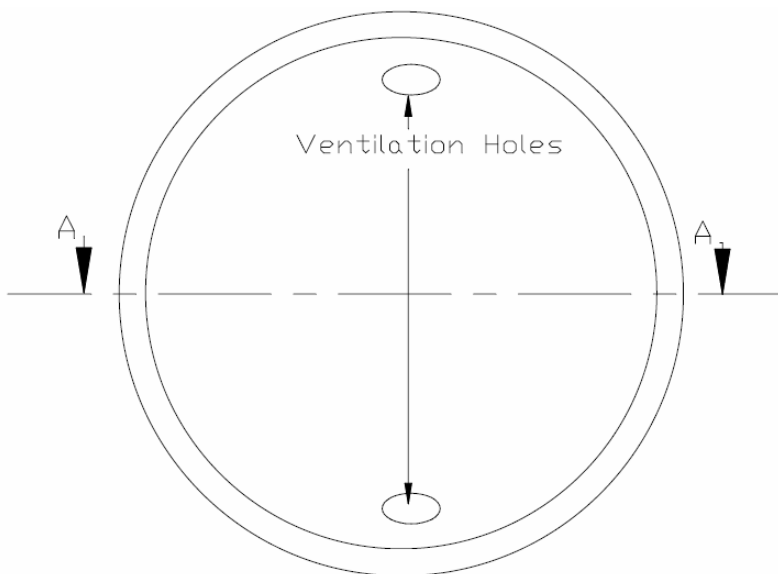



## MODEL FF109-300

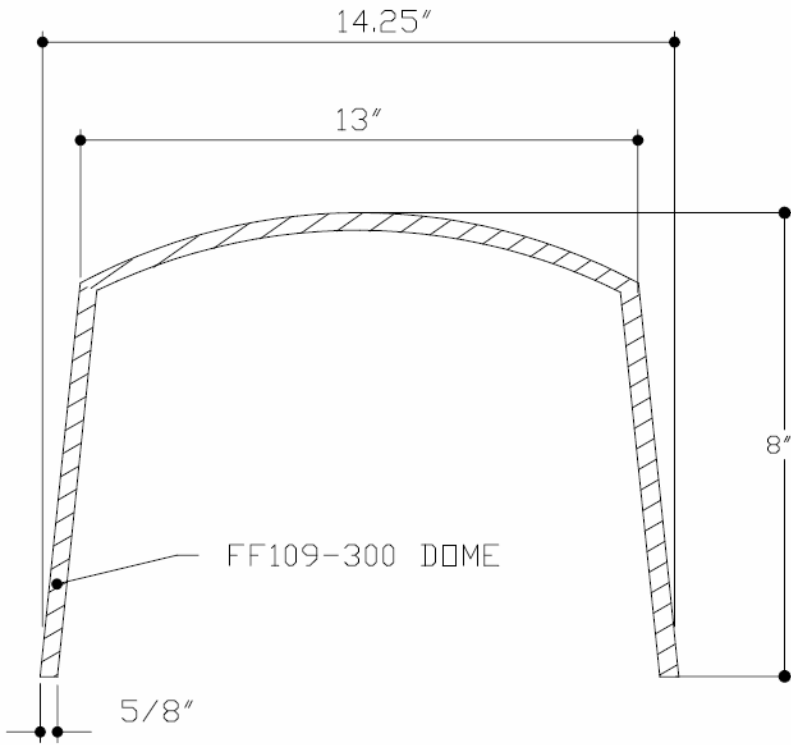

Model Number	Inside Height	Inside Diameter
FF109-300	7 3/8"	13"
Performance Data		
<b>For Use:</b>		
<ul style="list-style-type: none"> <li>UL Classified to maintain the fire rating (1 hour) for the following fire-rated floor/ceiling assemblies:</li> </ul> <p>L500 Series</p>		
		
General Information		
<b>Benefits:</b>		
<ul style="list-style-type: none"> <li>60 minute protection</li> <li>Fits most popular IC rated fixtures</li> <li>Can be used in L500 floor/ceiling assemblies</li> <li>Lightweight (approx. 1.5 lbs)</li> <li>Easy Installation—can be fitted in seconds—no screws, drilling or additional sealant required</li> <li>Flexible material enables cover to be fitted around obstacles or retro-fitted</li> <li>Enhances the acoustic protection of the ceiling</li> <li>Reduces heat loss through the fixture</li> <li>Significant energy cost savings</li> <li>Maintenance free</li> </ul>		
Manufactured By		
<p><b>Tenmat</b></p> <p>Distributed by <b>Techmat Supply</b>            4801, Glenwood Ave, Ste 200 Raleigh, NC            27612            Phone: (888) 573 3330            Email: <a href="mailto:info@techmatsupply.com">info@techmatsupply.com</a>  <a href="http://www.techmatsupply.com">www.techmatsupply.com</a></p>		