


## FF109-250 1 Hour Fire Rated Light Cover

### Step 1

- Install junction box according to manufacturer instructions.
- Ensure metal wire included with your cover is going through the pre-punched through slots near the top of the cover so that the coil is secured around the outside of the cone.
- Grasp the legs of the bronze wire firmly and roll cover into a tight cylinder.
- Keeping a tight grip on the legs, feed the cover through the ceiling cutout.

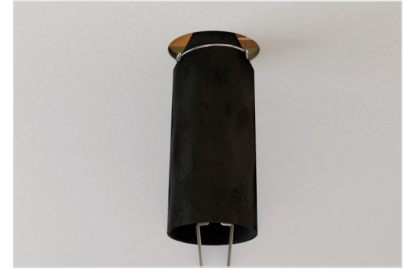


### Step 2

- Ensure cover has sprung back into its original cone shape before proceeding.
- Grasp legs and pull down until L section clears the underside of the ceiling.




### Step 3

- Move legs out until vertical part of L section is flush with the side of the cut out.
- Release the legs so they grip the underside of the ceiling.
- Remove the excess of both legs.

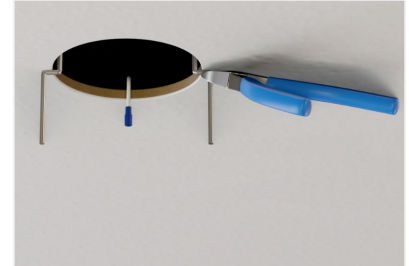

### Step 4

- Once cover is in place, LED light element can be fitted following the light manufacturer instructions.

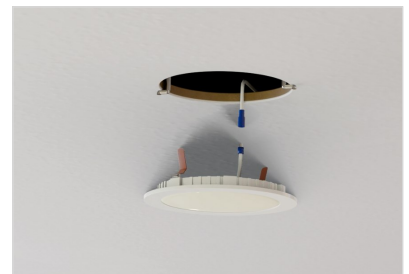

Ensure the cover fits your chosen light fixture.

*FF109-250 Overall Dimensions:*

- Outside Diameter 9 7/8"
- Outside Height 10 1/4"



**WARNING:** BE SURE THE ELECTRICITY TO THE SYSTEM YOU ARE WORKING ON IS TURNED OFF; EITHER THE FUSE REMOVED OR THE CIRCUIT BREAKER SET AT OFF.

**CONTAINS STONE WOOL INSULATION**

Stone fibers may cause temporary mechanical irritation to the skin, throat, nose and eyes.

**FIRST AID**

**Skin**

If irritation occurs, do not rub or scratch. Rinse under running water prior to washing with mild soap and water. Consult a physician if irritation persists.

**Throat and Eyes**

If irritation occurs, flush eyes with water and/or drink water to clear throat. Do not rub the eyes. Consult a physician if irritation persists.

**PRECAUTIONS**

- Wear long sleeve, loose fitting clothing, gloves and eye protection.
- For additional information, refer to the Material Safety Data Sheet (MSDS).