
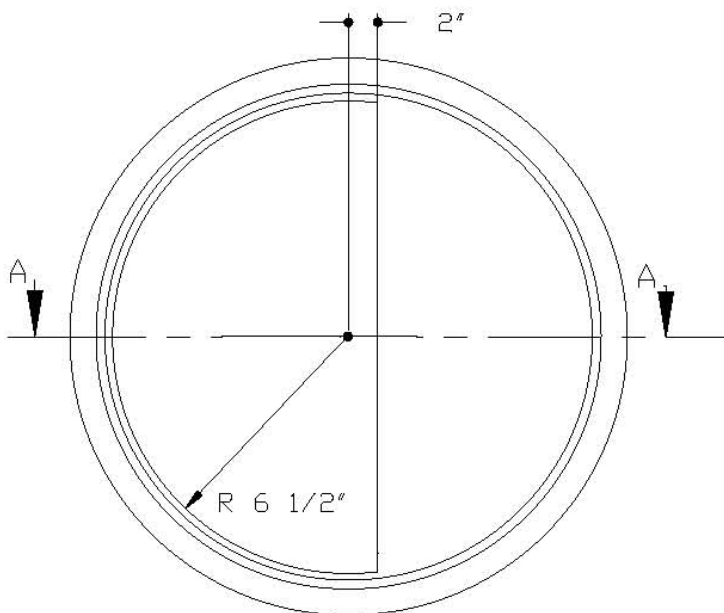


MODEL FF109X

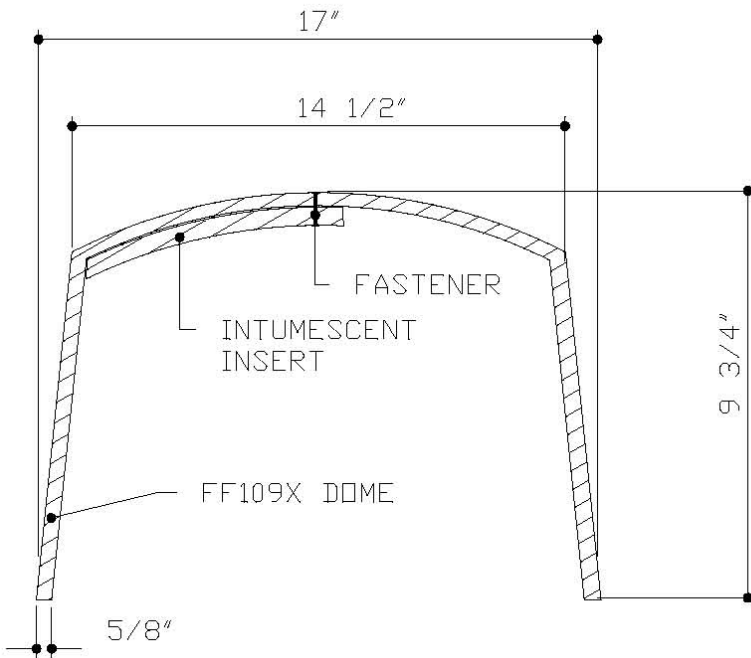

Model Number	Inside Height	Outside Diameter
FF109X	8"	17"

Performance Data

For Use:

- UL Classified to maintain fire ratings of up to two hours for the following fire-rated floor/ceiling assemblies: L500, D500, G500, D200, G200, J200 and L200 series
- UL Classified to maintain fire ratings of up to one hour for the following roof/ceiling assemblies (attics): P200 and P500 series



General Information

Benefits:

- 120 minute protection
- Fits most popular IC rated fixtures
- For joist spacing up to 24" on center
- Suitable for 2"x10", 2"x12", 2"x14", and 2"x16" joists
- Can be used in floor/ceiling, as well as roof/ceiling assemblies (attic)
- Lightweight (approx. 1.5 lbs)
- Easy Installation—can be fitted in seconds—no screws, drilling or additional sealant required
- Enhances the acoustic protection of the ceiling
- Reduces heat loss through the fixture
- Maintenance free

Distributed by

Tecmat Supply

4801, Glenwood Ave. Suite
 200, Raleigh NC 27612
 Phone: (888) 573-3330
 Email: info@fireproofing.us
 www.fireproofing.us